



Precision-V 3900 Solvent Product# 3900

Product Description

Techspray® Precision-V 3900 is a PFAS Free and 100% US Manufactured solvent.

Precision-V 3900 is ideal where a safer, nonflammable, non-PFAS (per EPA TSCA 8(a)(7) and 100% USA made cleaner is required. It has a much lower Global Warming Potential (GWP) than other fluorocarbon containing solvents that contain HFC and most HFEs. Precision-V cleaners leave no residue and evaporate extremely fast, and are nonflammable with no flash-point. Electronics, optics, and metal parts are quickly and thoroughly cleaned, eliminating the need for further rinsing. Precision-V is non-ozone depleting, so ideal replacements for cleaners containing Freon, HFC-141b and AK225.

Precision-V 3900 is a very high purity solvent suitable for wide variety of applications, including oxygen service exposure and heat transfer, electronics testing and precision cleaning applications.


Exposure to Precision-V solvents is less hazardous than many other solvents commonly used in vapor-degreasers: e.g. TCE (Trichloroethylene, CAS #79-01-6), nPB (n-Propyl Bromide, CAS #106- 94-5), and Perc (Perchloroethylene. CAS #127-18-4).

Features / Benefits

- Ideal Replacement for 3M Novec 7100, 7200, 7300
- 100% US Manufactured
- PFAS Free
- Non- Flammable
- Non-conductive
- Compatible with plastics
- Low toxicity
- Low global warming potential (GWP)
- Zero ozone depletion potential (ODP)
- VOC-exempt solvent (US EPA)
- Low surface tension for cleaning within tight areas

Applications

- Used in vapor-degreasers and general solvent cleaner
- Electronic Cooling
- Heat Transfer
- Immersion Cooling for Data Centers

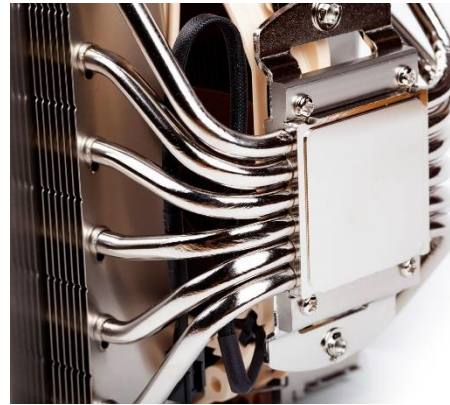


Typical Product Data and Physical Properties

Exposure Limit	>200 ppm
Physical State	Liquid
Odor	ethereal
Appearance	Clear, colorless liquid
Flash Point	none
Percent Volatile	100
Vapor Pressure	270 mmHg
Initial Boiling Point	122°F (50°C)
Freezing Point	-38.2°F (-39°C)
Density	1.39 g/mL
Operating Range	-39 °C to 50 °C
Surface Tension	15.11 dynes/cm
GWP	< 10
VOC	exempt (EPA)
Kauri-butanol Value	10 Kb
Ozone Depletion Potential	0
Absolute Viscosity	0.457 cps
OEL	None
Shelf life	5 years
Atmospheric Life	97 days
NVR (ND @ method limit) (ppm)	<0.7
Purity Elemental Analysis (ppm)	Na 0.1 B, Ca, K, Ag, Al, As, Ba, Be, Co, Cr, Cu, Fe, Ga, Ge, Hf, Bi Hg, In, Li, Mg, Mn, Mo, P, Pb, Rb, Re, S, Sb, Se, Si, Sn, Sr, Ta, Ti, Tl, V, W, Zn, Zr, Cd <0.1

Precision-V 3900 Solvent Product# 3900

Thermophysical Properties:

Precision -V solvents Kinematic viscosity [cSt] Vs Temperature Curve (°C)

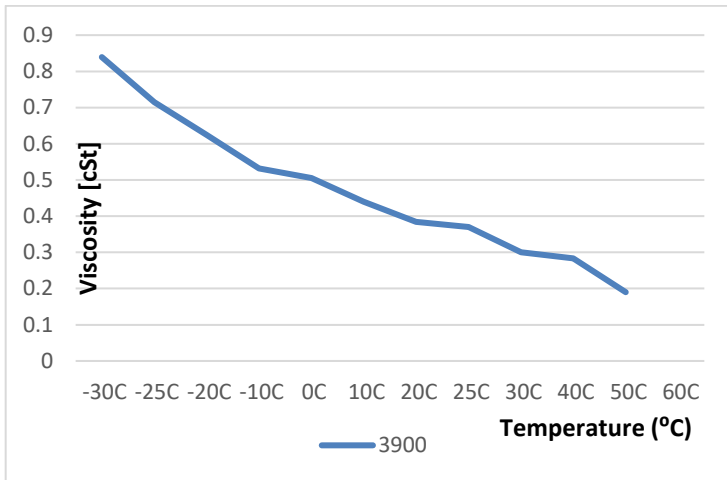

Reclamation Process

The reclamation (ie. boil down) process utilizes the vapor-degreaser as a still to distill solvent from the dirty boil sump and allows you to reclaim and reuse this solvent.

When it is determined that the Boil Sump needs to be cleaned out, you should do the following things to boil down the solvent:

1. If you have a 2 sump vapor-degreaser, drain the rinse sump into a clean container for reuse. If you have a one-sump vapor-degreaser, drain the spray reservoir using the spray wand. This material should be collected in a clean container, so it can be reused.
2. Allow the solvent to continue to boil, and the vapors to condense, until such time as one of two things happens:
 - a. the High Temperature Control (HTC) trips and turns off the heat to the heating elements or b. the Liquid Level Control trips because the level in the Boil Sump is too low.
3. Drain the remaining solvent/soil mixture into a container that is labeled as Hazardous Waste. This material can be used in future "boil downs" to reclaim more of the solvent in the mixture.
4. Use the retained solvent (from step 1) to refill the vapor-degreaser and add whatever volume of solvent is necessary to completely fill the machine.

When you "boil down", always put the solvent/soil mixture into the vapor-degreaser to reclaim additional amount of the solvent from this mixture.

Compatibility

Precision-V cleaners are generally compatible within normal operating conditions of vapor degreaser and with exposed materials normally found with the equipment. Specific plastic and elastomeric formulations vary with manufacturers; therefore, we recommend compatibility verification when required.

Material	Compatibility
Plastics	Excellent
Acrylics	Excellent
ABS/Polycarbonate	Excellent
Nylon	Excellent
PTFE	Excellent
Epoxy	Excellent
PEEK	Excellent
Silicones	Good
Ceramics	Excellent
Metals	Excellent

Packaging and Availability

Precision-V Vapor-Degreaser Flux Remover available in the following sizes:

3900-G	1 gal (3.8L)
3900-5G	50 lbs. in 5 gal (18.9L)
3900-54G	580 lbs. in 54 gal (204L)

Environmental Policy

Techspray® is committed to developing products to ensure a safer and cleaner environment. We will continue to meet and sustain the regulations of all federal, state and local government agencies.

Resources

Techspray® products are supported by global sales, technical and customer services resources.

For additional technical information on this product or other Techspray® products in the United States, call the technical sales department at 800-858-4043, email tsales@techspray.com or visit our web site at: www.techspray.com.

Important Notice to Purchaser/User: The information in this publication is based on tests that we believe are reliable. The results may vary due to differences in tests type and conditions. We recommend that each user evaluate the product to determine its suitability for the intended application.

Contact Techspray provision of TSCA 5(a)2 final significant new use rule.